



■ made of PUR, heat-insulated and CFC-free



Height 78 cm, Depth 24 cm, Diagonal 44 cm

With dual volume flushing technology or Start/Stop flush completely fitted for wall-hanging WC:

- adjustable in 4-stages
- with fastening material (for corner/for single-sided wall fastening)
- with sound proof set
- with height-adjustable feet (up to 15 cm)
- with assembly room cover below
- with moulded cistern (internal part from Geberit®) incl. cistern protection
- site protection caps

- with metre indication line at $0.5 \, \text{m}$
- with WC connection pipes (90°bend made of PE Ø 90/90 mm and PE adaptor Ø 90/110 mm)

605,– €

- with WC connection pipes \varnothing 90 mm
- with WC fastening set
- actuation from the front
- for flush panels "Omega" (Geberit®)
- without flush panel




Omega 20



Omega 30

■ Note: When using the "Omega 60" flush panel, the cladding on the block must be at least 24 mm thick!

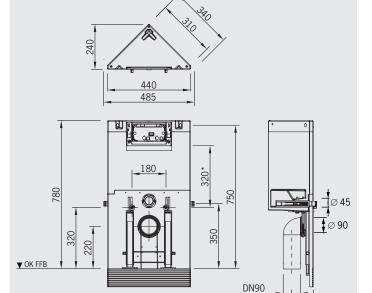

* up to the bottom of the button

340 240
 water connection at the front bottom left

- water connection at the none bottom left		
Technical data Corner WC-blocks		
Adjustment range height:	0–150 mm	
Adjustment range wall:	0–20 mm	
Dual volume flushing technology (can be adjusted):		
Factory setting:	4/6	
Small flush volume:	3–4	
Large flush volume:	61	
Water connection:	1/2" female thread	
Drain:	90°-bend made of PE Ø 90/90 mm and PE-adaptor Ø 90/110 mm	