

■ Attica Super-2 drain for use with water collector

2 in 1



Assembly example: Attica Super-2 drain with wedge (long version) with water collector



Attica Super-2 drain without wedge (short version)

Attica Super-2 drain DN 100 made of PUR/ stainless steel

the comprehensive solution
for **main and emergency
drainage through only
one attica passage**. The
drain is available in a long
or short version, with/with-
out wedge and with various
connection collars.

The **scope of delivery** of the **atti-
ca Super-2 drain** includes:

- 1 **Attica Super drain DN 100**
with/without wedge (without PP
pipe)
- 2 **Stainless steel pipe** with
sleeve DN 100, 54 cm long
- 3 **Stainless steel pipe** with
sleeve DN 100, 30 cm long,
with cutaway for main and emer-
gency drainage and baffle plate
- 4 **Water guiding plate** (back and
front) for emergency drainage
- 5 **Leaf trap grate** made of stain-
less steel (Art. No. 3494.S)

optional extra:

- 6 **Water collector** made of zinc
sheet (drain support 100 mm/
6-piece, Art. No. 3450)
- 7 **Locking ring DN 100**
(Art. No. 2695)



Attica Super-2 drain with wedge (short version) with water collector



Attica Super-2 drain without wedge (long version) with water collector

■ Attica Super-2 drain for use with a water collector

Dimension | Art. No.

2 in 1



Attica Super-2 drain made of PUR with wedge (short version)
for attica thickness **up to 60 cm**
DN 100 **3433.BIT.S2**

2 in 1



Attica Super-2 drain made of PUR without wedge (short version)
for attica thickness **up to 60 cm**
DN 100 **3471.S2**

2 in 1



Attica Super-2 drain made of PUR DN 100 with wedge (long version)
for attica thickness **up to 110 cm**
DN 100 **3433.BIT.S2.L**

2 in 1



Attica Super-2 drain made of PUR without wedge (long version)
for attica thickness **up to 110 cm**
DN 100 **3471.S2.L**




Water collector
3450



Safety clamp
2695


Installation example Attica Super-2 drain

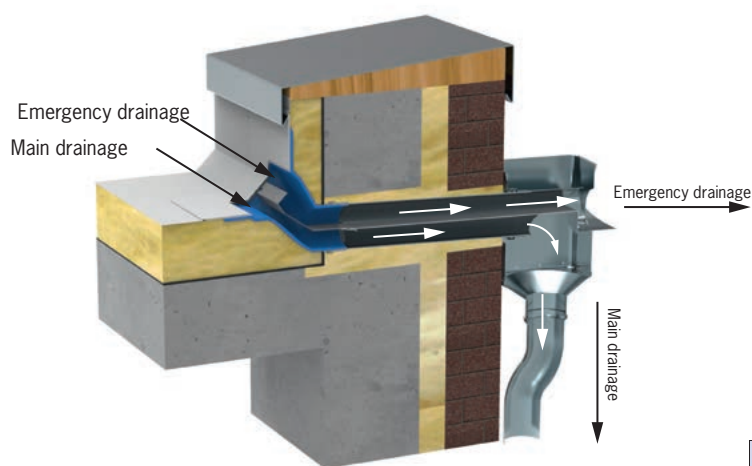

Attica Super-2 drain with water collector in an insulated roof.

To prevent frost damage, we recommend using our trace heating systems (see page 74).

Technical data Attica Super-2 drain

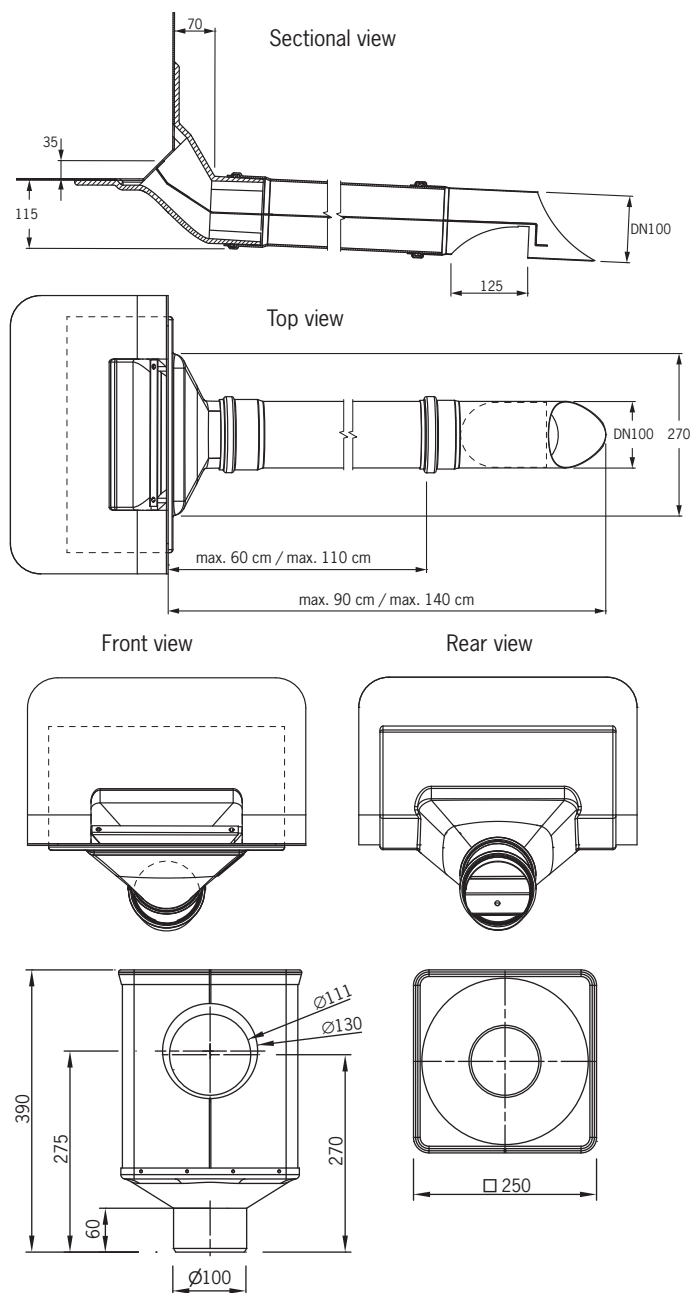


Art.	Drainage capacity*
all attica Super-2 drains	Main drainage: 3,6 l/s, Emergency overflow: 3,0 l/s (35 mm)
The use of the stainless steel leaf trap grate does not reduce the drainage capacity!	

*Drainage capacity acc. to DIN EN 1253-2 in l/sec (accumulation height in millimeters)

■ Attica Super-2 drain with partial flow diversion



Attica Super-2 drain with wedge with partial flow diversion (short version).
The version with a wedge always comes with a bitumen collar.

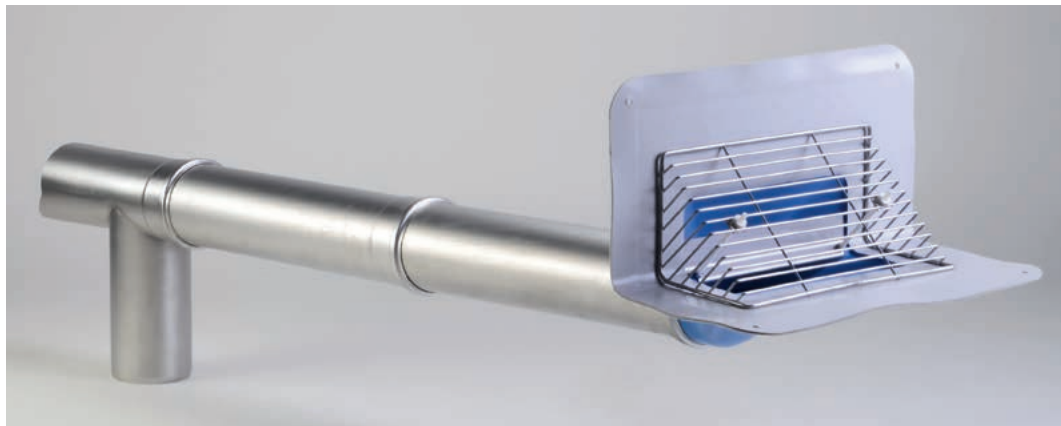

Attica Super-2 drain without wedge with partial flow diversion (long version).
The version without a wedge is available with various connection collars.

Attica Super-2 drain DN 100 made of PUR/ stainless steel with partial flow diversion – the solution for **main and emergency drainage through only one attica passage**. The drain is available in a long or short version, with/ without wedge and with various connection collars. The **partial flow diversion enables a direct connection to the downpipe – a water collection box is no longer required here!**

The **scope of delivery** of the **attica Super-2 drain with partial flow diversion** includes:

- 1 **Attica Super drain DN 100** with/without wedge (without PP pipe)
- 2 **Stainless steel pipe** with sleeve DN 100, 54 cm long
- 3 **Partial flow diversion** made of stainless steel
- 4 **Water guiding plate** (back and front) for emergency drainage
- 5 **Leaf trap grate** made of stainless steel (Art. No. 3494.S)



Attica Super-2 drain without wedge with partial flow diversion (short version).
The version without a wedge is available with various connection collars.



Attica Super-2 drain with wedge with partial flow diversion (long version).
The version with a wedge always comes with a bitumen collar.

Dimension | Art. No.

2 in 1



Attica Super-2 drain made of PUR with partial flow diversion made of stainless steel with wedge (short version)
for attica thickness **up to 60 cm**
DN 100 **3434.BIT.S2**

2 in 1




Attica Super-2 drain made of PUR with partial flow diversion made of stainless steel without wedge (short version)
for attica thickness **up to 60 cm**
DN 100 **3472.S2**

2 in 1



Attica Super-2 drain made of PUR with partial flow diversion made of stainless steel with wedge (long version)
for attica thickness **up to 110 cm**
DN 100 **3434.BIT.S2.L**

2 in 1

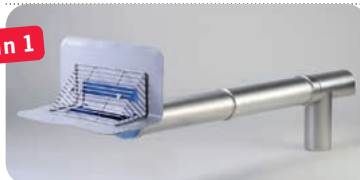


Attica Super-2 drain made of PUR with partial flow diversion made of stainless steel without wedge (long version)
for attica thickness **up to 110 cm**
DN 100 **3472.S2.L**




Adaptor DN 100
made of titanium zinc, without seal
DN 100 **2633**
i.d. 100, 6-piece
For a connection with a vertical zinc pipe.
Warning! Not backflow-secure!

Attica Super-2 drain with partial flow diversion


Technical data Attica Super-2 drain with partial flow diversion

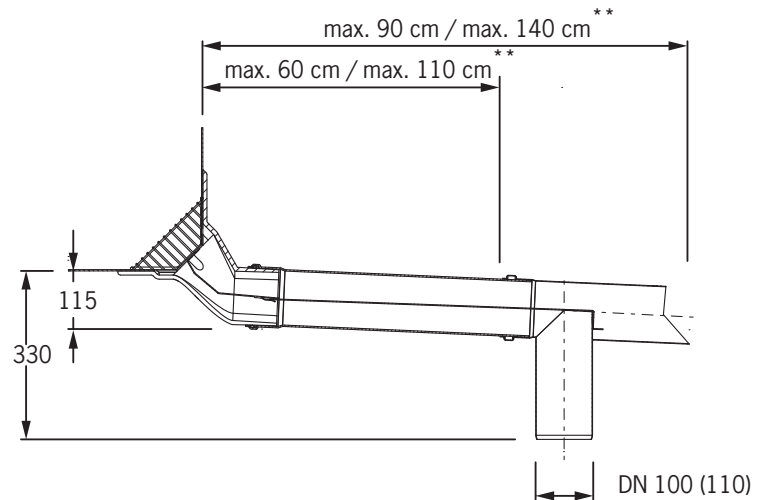

** Long version with 2nd stainless steel pipe and with extended guide plate




Installation example Attica Super-2 drain with partial flow diversion

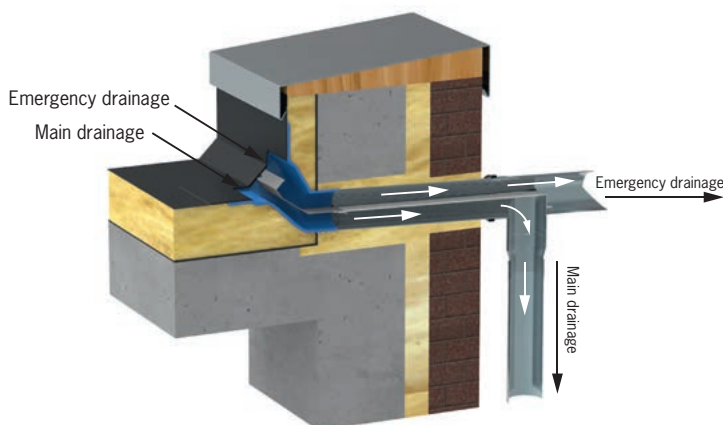

Attica Super-2 drain with partial flow diversion in an insulated roof.
To prevent frost damage, we recommend using our trace heating systems (see page 74).

Technical data adaptor



Art.	Drainage capacity*
all Attica Super-2 drains	Main drainage: 3,6 l/s, Emergency overflow: 3,0 l/s (35 mm)
The use of the stainless steel leaf trap grate does not reduce the drainage capacity!	

*Drainage capacity acc. to DIN EN 1253-2 in l/sec (accumulation height in millimeters)