


■ Stainless steel drain The indestructible one




The Grumbach stainless steel drain

- the robust, non-flammable drain series made of rust free stainless steel
- available in three nominal widths DN 50, 70 or 100
- with fastening holes in the fixed flange for secure fastening to the surface
- absolutely back-flow secure due to a sleeve connection
- due to the flange press seal and clamp, any extendable roof seal can be connected securely
- high stability and drainage capacity
- due to its attractive appearance it can also be used as an Attika emergency overflow
- due to its special construction (without pot, long supports) it is easy to assemble and also a good choice as a redevelopment drain, among other things.

Installation example und technical data stainless steel drain

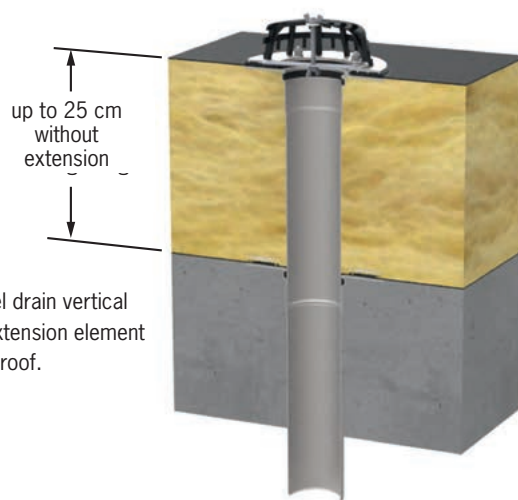

Stainless steel drain vertical
DN 70 with extension element
in a insulated roof.

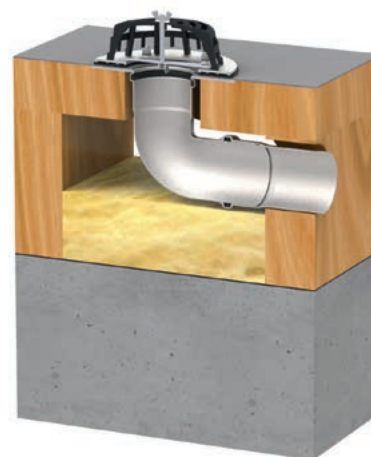

Stainless steel drain horizon-
tal DN 70 in a ventilated roof

Dimension | Art. No.

Stainless steel drain

vertical

DN 50	2600
DN 70	2602
DN 100	2604

Stainless steel drain

horizontal:

DN 50	2611
DN 70	2612
DN 100	2614

Extension element made of stainless steel

DN 50	2680
DN 70	2682
DN 100	2684

Art.	DN	d1	d2	H	H1	H2	X	T	Drainage capacities*
2600, 2680	50	50	65	45	—	—	150	—	1,5 l/s (35 mm)
2602, 2682	70	75	90	55	—	—	190	—	3,5 l/s (35 mm)
2604, 2684	100	110	125	65	—	—	240	—	5,1 l/s (35 mm)
2611	50	50	—	38	81	106	150	170	2,0 l/s (35 mm)
2612	70	75	—	50	112	150	190	210	4,1 l/s (35 mm)
2614	100	110	—	55	133	188	240	260	5,2 l/s (35 mm)

**The stainless steel drains are non-flammable acc. to DIN 4102
(Fire protection class A1).**

Technical data stainless steel drain

