

■ Eccentric Drain for the downpipe sealing lead-through



Eccentric drain with terrace construction kit and sieve ring

Eccentric drain

made of high quality, CFC-free polyurethane hard foam (PUR). Optimal for draining roof surfaces lying one above the other through one downpipe. With adjusted flange for direct installation against the building wall.

The incoming and outgoing pipe can be **adjusted eccentricly**, this allows the distance to the wall and misalignment of the downpipe to be easily compensated.

The eccentric drain is ideal for use on balconies on different storeys.

The connection collar is available in all common roof sealings. An eccentric disk is included in the scope of delivery; inlay sieve, sieve ring attachment and terrace construction kit are available as accessories.



Eccentric drain incl. eccentric disk



Eccentric drain with inlay sieve

The maximum adjustment from the centre between the inlet and outlet downpipe is 96 mm! Thanks to its various components, the eccentric drain from Grumbach solves a lot of problems with downpipe ceiling lead-throughs.



Eccentric drain with sieve ring attachment DN 100



Eccentric drain with sieve ring attachment DN 70

Installation example eccentric drain with/without terrace construction kit

Eccentric adjustability (1) of the sieve ring element


Eccentric adjustability (2) of the eccentric disc

Eccentric adjustability (3) of the drain support


Sieve ring element with downpipe adaptor

Terrace construction set can be walked on

Eccentric drain with eccentric disk

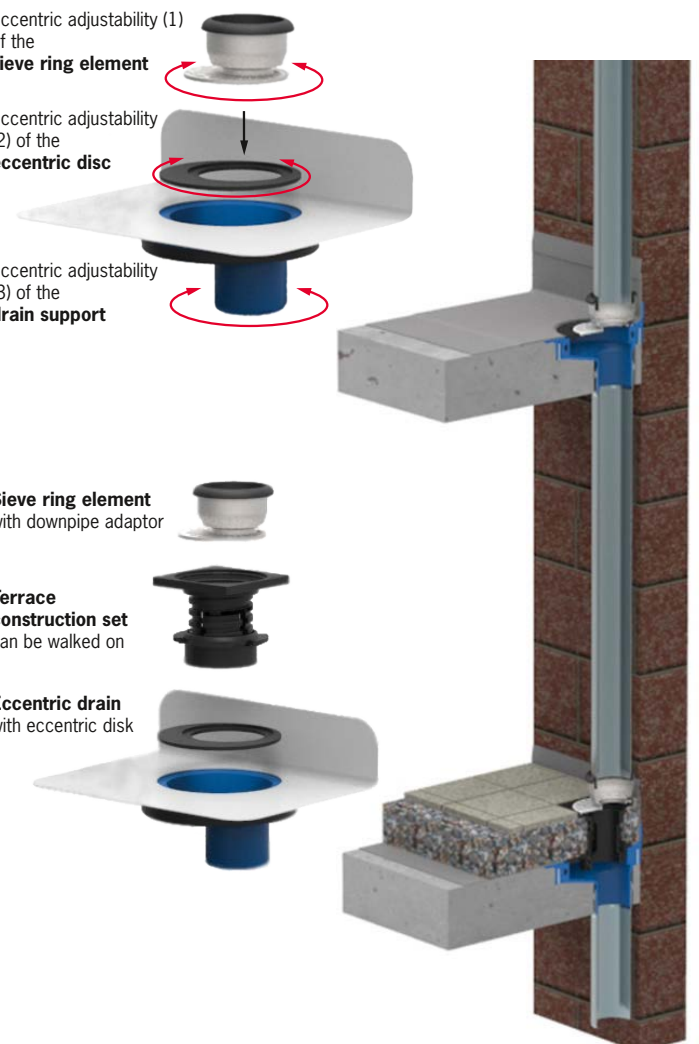

Dimension | Art. No.



Eccentric drain
incl. eccentric disk
DN 100 **3722**



Inlay sieve, round made of aluminum
suitable for eccentric drain
diameter 160 mm
3449.S



Sieve ring attachment, eccentric
suitable for eccentric drain, for take-up of downpipes DN 70
DN 70 **5903.E**



Sieve ring attachment, eccentric
suitable for eccentric drain, for take-up of downpipes DN 100
DN 100 **5904.E**



Terrace construction kit, can be walked on (black)
complete with end grating without odour trap
5902





Terrace construction kit PLUS
as Art. No. 5902, but with top covering made of stainless steel
5902.E

■ Eccentric Drain for the downpipe sealing lead-through

Technical data eccentric drain

The maximum adjustment from the centre between the inlet and outlet downpipe is 96 mm!

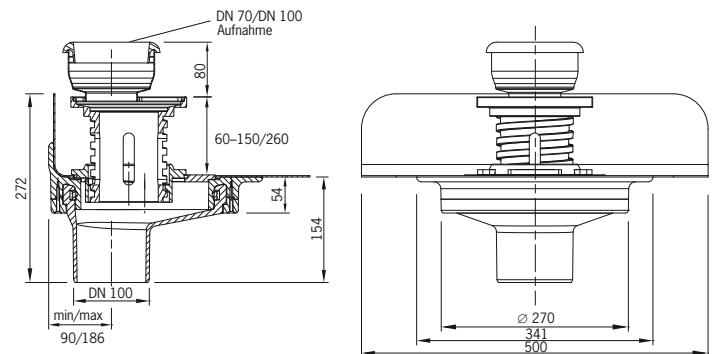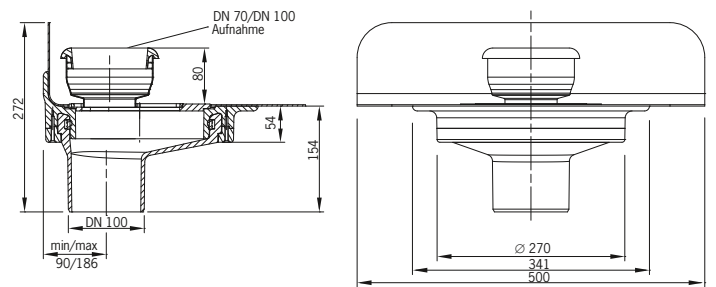

Installation example eccentric drain



Eccentric drain with terrace construction kit and sieve ring attachment DN 70



Eccentric drain with terrace construction kit and sieve ring attachment DN 100