

- Pre-fabricated elements for building floor-level showers
- made of extra stable Polyurethane integral rigid foam (PUR)
- can be tiled directly

Shower floor elements made of PUR with eccentric punctual drainage

Ultra flat and
heavy duty!



Shower floor element "ultra flat" made of PUR 900x900x25 mm with eccentric drainage

Shower floor element "ultra flat" made of PUR with eccentric drainage, without drain

90x90 cm

Art.-No. 1843


280,- €

120x120 cm

Art.-No. 1844

360,- €

- made of high grade, CFC-free and extra stable Polyurethane integral rigid foam (PUR)
- heat and condensation insulated
- can be tiled directly
- **with high point load capacity, therefore also suitable for wheelchairs**
- with built in 4-sided slope
- **with extra low installation height!**
- with expanded, absolutely waterproof sealing foil with overlap, therefore reliable sealing of all of the connections (Floor/Floor, Floor/Wall)
- A connecting-sealing strip for the internal corners is included in the scope of delivery (Art-No. 1894).
- square-shaped 90 x 90 cm or 120 x 120 cm
- horizontal or vertical drain, **can be ordered separately, see page 46**
- Design grates made of stainless steel are available at extra charge, see page 46.
- **Special shapes can be supplied on request at extra cost (80,- €, Art.-No. 1899.0)! See order form on page 56.**

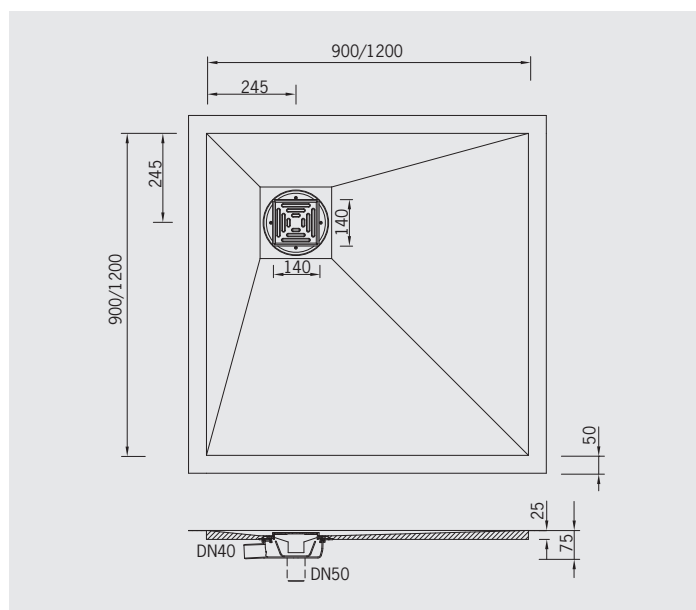

Technical data

Dimensions	900 x 900 x 25 mm
	1200 x 1200 x 25 mm
Height of the PUR panel	25 mm
Height with drain siphon (horizontal)	75 mm without use of adjustable feet
	100 mm with adjustable feet (min.)
	120 mm with adjustable feet (max.)
Drain connection	DN 40 horizontal
	DN 50 vertical
Drain capacity	0,7 l/s
Slope	ca. 2 %
Strength	ca. 350 kg/m ²
Density	ca. 400 kg/m ³
Tile height	8–45 mm
Inlet grate made of stainless steel	140x140 mm
Water sealing height	40 mm
Sealing strip overlap	50 mm

Please order separately:



The bathroom drain made of PUR, vertical or horizontal, suitable for the respective shower floor element (see page 46).



■ Bathroom drain made of PUR
vertical DN 50

Art.-No. 1880 85,- €


- large water sealing volume due to large sealing water container made of EPDM
- with stainless steel grate 140x140 mm. Designer grate available at extra cost, see page 47)
- with new odour trap made of hygienic EPDM
- all individual parts of the odour trap can be easily removed and cleaned



■ Bathroom drain made of PUR
horizontal DN 40

Art.-No. 1881 95,- €


- large water sealing volume due to large sealing water container made of EPDM
- with stainless steel grate 140x140 mm. Designer grate available at extra cost, see page 47)
- with new odour trap made of hygienic EPDM
- all individual parts of the odour trap can be easily removed and cleaned

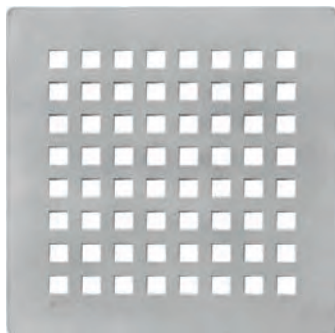

■ Design grate "8x8" made of stainless steel

Art.-No. 1843.8x8 (extra charge) 120,- €


- as accessory for the bathroom drains made of PUR

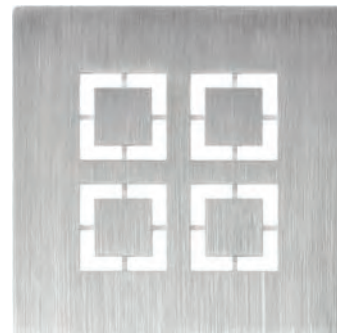

■ Design grate "2x2" made of stainless steel

Art.-No. 1843.2x2 (extra charge) 120,- €

- as accessory for the bathroom drains made of PUR



Size A:

Size B:


Size A and Size B max. 120 cm

☐ **Shower floor element (PUR)**
with eccentric drain ☐ horizontal ☐ vertical

☐ **Support frame**

☐ **Enquiry**

☐ **Order**

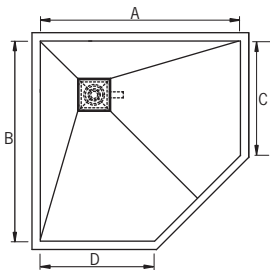

Size A:

Size B:


Size C:

Size D:

Size A and Size B max. 120 cm

☐ **Shower floor element (PUR)**
with eccentric drain ☐ horizontal ☐ vertical

☐ **Support frame**

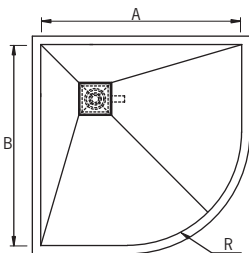

Size A:

Size B:

Size R:

Size A and Size B max. 120 cm

☐ **Shower floor element (PUR)**
with eccentric drain ☐ horizontal ☐ vertical

☐ **Support frame**

Please note:

All Grumbach shower floor elements have a 5 cm wide **sealing foil cover**.

Through the cutting of the Grumbach shower floor element, the ends of the sloping lines no longer end in the corners of the elements. After cutting, the surrounding edge of the shower element is no longer of uniform height. This can be remedied on site with the corresponding tile adhesive.

The support frames only fit onto the Grumbach shower floor elements.

Please fill in the fields:

Sender/Stamp

Contact person

Telephone

Telefax

Date/Signature